




# BLUE-G THREE PHASE SERIES

BluE-15KT / BluE-17KT / BluE-20KT / BluE-25KT

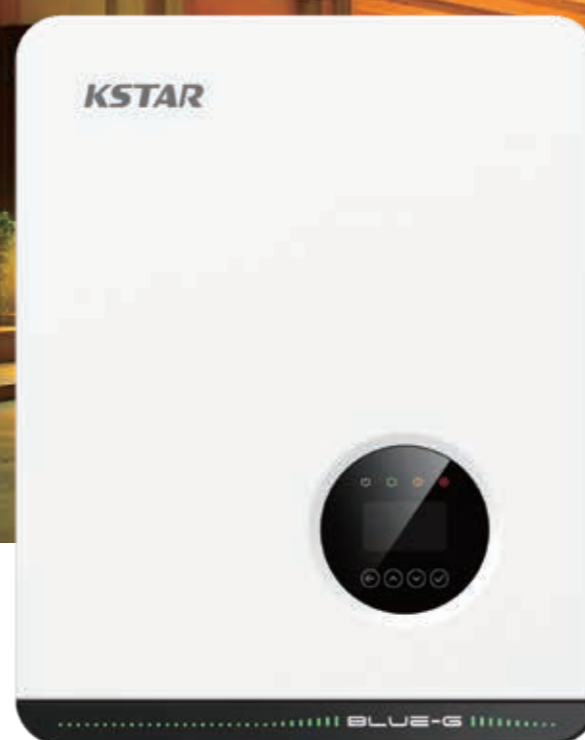

## PV On-Grid String Inverter



Max. PV voltage up to 1100V  
Type II DC /AC SPD



Compatible for big capacity PV panel  
WiFi / 4G Plug optional



DC/AC ratio up to 2  
IP66 protection



High efficiency up to 98.6%  
Smaller and lighter

MODEL	BluE-15KT	BluE-17KT	BluE-20KT	BluE-25KT
<b>Input(DC)</b>				
Max. DC Voltage	1100V	1100V	1100V	1100V
Nominal Voltage	620V	620V	620V	620V
Start Voltage	180V	180V	180V	180V
MPPT Voltage Range	140 V~1,000V	140 V~1,000V	140 V~1,000V	140 V~1,000V
Number of MPP Tracker	2	2	2	2
Strings Per MPP Tracker	2/1	2	2	2
Max. Input Current Per MPPT	30A/15A	30A	30A	30A
Max. Short-circuit Current Per MPPT	40A/20A	40A	40A	40A
<b>Output(AC)</b>				
Nominal AC Output Power	15000W	17000W	20000W	25000W
Maximum AC Output Power	16500VA	18700VA	22000VA	27500VA
Nominal AC Voltage	400V 3L+N			
AC Grid Frequency Range	50Hz / 60Hz(±5Hz)			
Maximum Output Current	23.9A	27.1A	31.9A	39.9A
Power Factor(Φ)	0.8leading-0.8lagging			
THDi	3%			
<b>Efficiency</b>				
Max. Efficiency	98.6%	98.6%	98.6%	98.6%
Euro Efficiency	98.2%	98.3%	98.3%	98.3%
<b>Protection devices</b>				
DC Switch	Yes			
Output Over Current	Yes			
Anti-islanding Protection	Yes			
DC Reverse Polarity Protection	Yes			
String Fault Detection	Yes			
AC/DC Surge Protection	DC: Type II / AC: Type III / Type II Optional			
Insulation Detection	Yes			
AC Short Circuit Protection	Yes			
<b>General Specifications</b>				
Dimensions W x H x D	380x483x193mm			
Weight	25kg			
Operating Temperature Range	-25°C~+60°C			
Cooling Type	Fan Cooling			
Max. Operation Altitude	4000m			
Max. Operation Humidity	0-100%(No Condensation)			
AC Output Terminal Type	Connector			
IP Class	IP66			
Topology	Transformer-less			
Communication	RS485/Wifi/4G			
Display	LCD			
Certification & Standard	EN/IEC62109-1/2 ; IEC/EN61000-6-2;IEC/EN61000-6-4;IEC61683;IEC60068;IEC60529;IEC62116;IEC61727; EN50549-1;AS 4777.2;VDE-AR-N-4105;VDE 0126-1-1;CEI0-21;G98;G99;C10/C11;NB/T32004-2018 ; GB/T19964-2012			

\* Specifications subject to change without prior notice.